

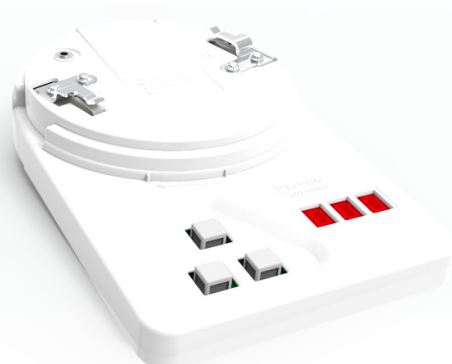
# ESPintelligent

## TCH-B200

### DEVICE ADDRESS PROGRAMMER

#### Features

- ▶ Lightweight design
- ▶ Quick and reliable addressing
- ▶ Over 8000 address settings from one battery
- ▶ Displays sensor analogue value
- ▶ Ability to disable polling of sensors.




#### Description

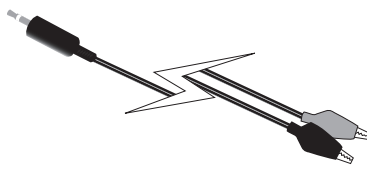
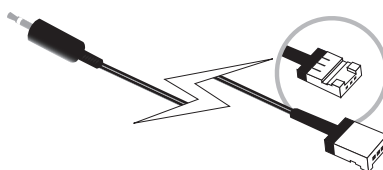
Model TCH-B200 is a hand held address programmer designed to address the ESP range of Sensors and all other addressable devices such as wall sounders, mini modules and manual call points (with the use of a programming lead – sold separately).

The unit is designed to be light, robust and easy to use and operates from a single PP3 size battery, which gives the capacity for up to 8000 operations. The programmer is also capable of displaying the sensor analogue values.

#### Specification

<b>Ordering Codes</b>	TCH-B200		Shown with ALN-EN sensor fitted – not supplied
<b>Battery Type</b>	9 VDC		
<b>Operating Temperature Range</b>	-10 °C to +50 °C		
<b>Colour / Case Material</b>	White / ABS		
<b>Weight (g) / Dimensions (mm)</b>	140 (Including Battery) / L160 x D30 x W99.5		

#### Ancillaries

<b>Ordering Codes</b>	PL-2 (programming lead)		For use on Hochiki legacy devices. CHQ-BS call points for example. The jack plug fits into the socket on the TCH-B200 programmer and the square programming plug fits to the device
<b>Length</b>	660 mm		
<b>Weight</b>	15 g		
<b>Connections</b>	<ul style="list-style-type: none"> <li>• 2 x Crocodile Clips</li> <li>• 2.5 Jack Plug</li> </ul>		
<b>Ordering Codes</b>	PL-3 (programming lead)		For use on Hochiki devices. HCP-E(SCI) call points for example. The jack plug fits into the socket on the TCH-B200 programmer and the square programming plug fits to the device
<b>Length</b>	700 mm		
<b>Weight</b>	10 g		
<b>Connections</b>	<ul style="list-style-type: none"> <li>• 3 Pin Molex</li> <li>• 2.5 Jack Plug</li> </ul>		